


Leygatech



OUR SOLUTIONS LINERS FOR RIGID THERMOFORMING

LEYGATECH offers you a range of films for lamination that can be laminated with all types of rigid materials for thermoforming.

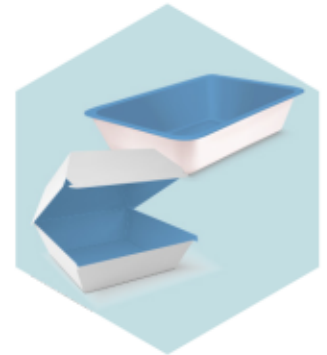

MATERIAL

- PE/PS
- PE/EVOH/PS
- PE/EVOH/PP
- PE/EVA
- PE/EVOH/EVA
- PP
- PP/EVOH/PP

MAIN CHARACTERISTICS

- For hot lamination or with adhesive
- Low or deep thermoforming
- All kinds of supports: CPP, aPET, XPS, PVC, cardboard, cellulose

BARRIER PROPERTIES

- Gas Barrier: Medium or High
- Water vapor Barrier

OPTIONS

ADDITIVATION:

- Peelable

SPECIFIC PROPERTIES:

- Adjustable sealing properties according to your need

CAPABILITY



Thickness
24 to 200µm



Width
200 to 1800mm



Color
Different colors and opacities available on request



Corona treatment
38 to 44 Dynes



Coefficient of Friction
0.1 to > 0.5



Water Vapor Barrier
Up to <math>< 1g/m^2/24h</math>



Oxygen barrier
Up to <math>< 0.1cm^3/m^2/24h</math>

You need more informations about our solutions?

You're looking for a specific film, tube or bag with innovative features?

Please don't hesitate to contact us: **+33(0)4 71 75 11 80** or leygatech@leygatech.fr

Quadruple certification
FSSC 22000
ISO 9001
ISO 14001
ISO 15378